



MODEL 220 SPECIFICATIONS


Remote Display

Features



The Model 220 Remote Display is designed to operate with any standard RS232 input to provide Remote Display capabilities for a computer, PLC, or scale display. The Model 220 Display has 5.5-inch tall digits viewable from up to 125 feet and is encased in an aluminum extruded cabinet.

Operation

The computer passes numbers and then a carriage return (ASCII 13D) and the numbers will be displayed on the Model 220. To display a blank screen, pass a carriage return (ASCII 13D). Insert the decimal point in the number string and it will light. Leading zeros will be blanked if the user selectable option is enabled.

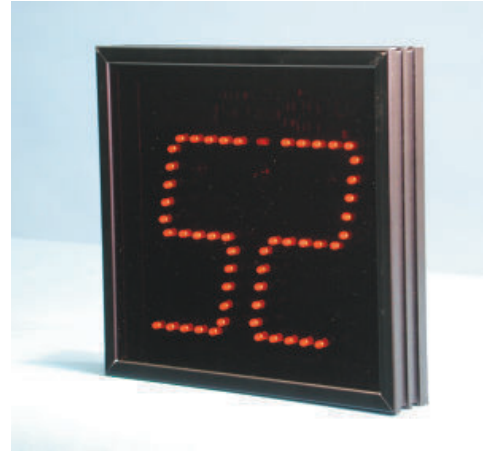

Microframe® Model 220 Display

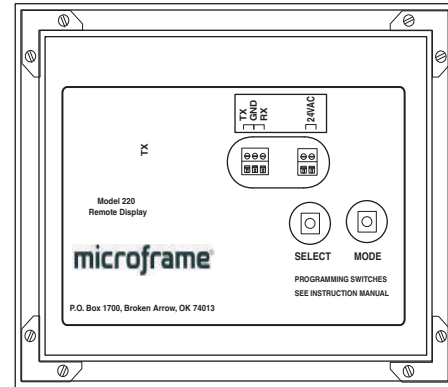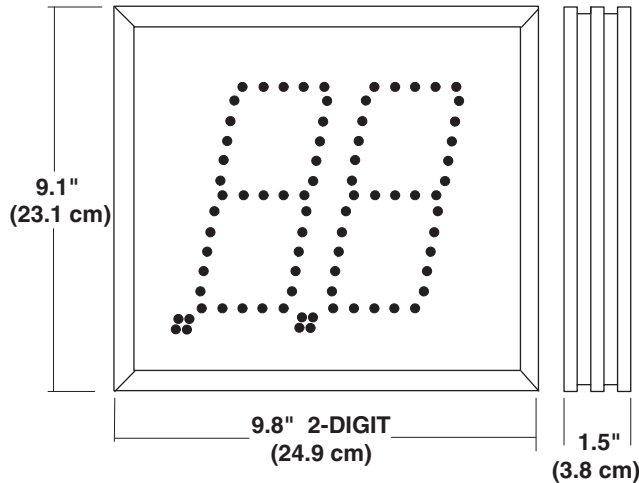

A0220\AX\9700.ai

Model 220 Specifications

Protocol	RS232
Power Input Requirements	24 VAC or DC @ 1.5 Amps
Baud Rate.....	1200 to 9600 User Programmable
Maximum Number of Addresses	99 Different Display Addresses
Digit Height	5.5 Inch (14 cm)
Character Viewing Distance	125 Feet in Normal Light
Case	Aluminum Case with Plexiglas Faceplate
Operating Temperature.....	-20° C to 60° C or -4° F to 140° F
Weight	2.5 Pounds (1.1 kg)

Support and Sales
800-635-3811

Microframe® Corporation
www.microframecorp.com

P.O. Box 1700
Broken Arrow, OK 74013