



# MODEL 230 SPECIFICATIONS


## Remote Display

### Features


The Model 230 Remote Display is designed to operate with any standard RS232, RS485, or 20 mA current loop input to provide Remote Display capabilities for a computer, PLC, or scale display. The Model 230 Display has 5.5-inch tall digits viewable up to 125 feet and is encased in an aluminum extruded cabinet.

### Operation

The computer passes numbers and a carriage return (ASCII 13D), and the numbers will be displayed on the Model 230. To display a blank screen, pass a carriage return (ASCII 13D). Insert the decimal point in the number string and it will light. Include a colon in the number string to light the colon for that number. Leading zeros will be blanked if the user selectable option is enabled.

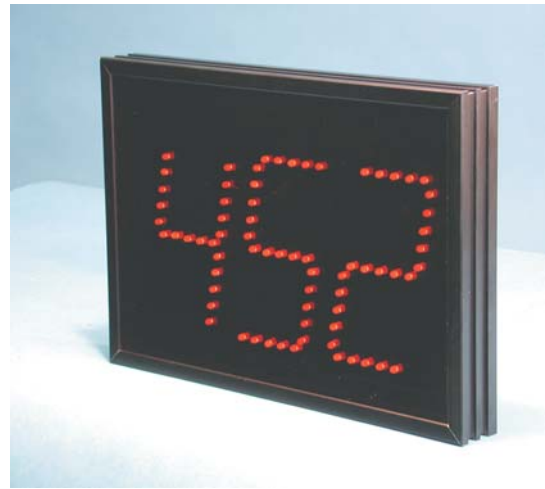

Microframe® Model 230 Display

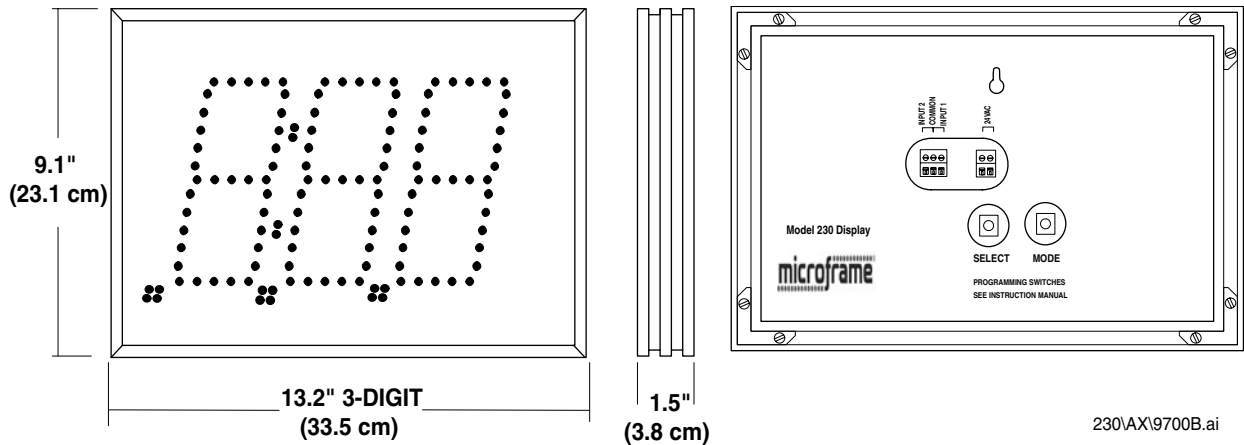

### Model 230 Specifications

Protocol.....	RS232, RS485, or 20 mA
Power Input Requirements .....	24 VAC or DC @ 1.5 Amps
Baud Rate .....	1200 to 9600 User Programmable
Maximum Number of Addresses .....	99 Different Display Addresses
Digit Height .....	5.5 Inch (14 cm)
Character Viewing Distance .....	125 Feet in Normal Light
Case .....	Aluminum Case with Plexiglas Faceplate
Operating Temperature .....	-20° C to 60° C or -4° F to 140° F
Weight .....	3.0 Pounds (1.4 kg)

**Support and Sales**  
**800-635-3811**

Microframe® Corporation  
www.microframecorp.com

P.O. Box 1700  
Broken Arrow, OK 74013