



# MODEL 265 SPECIFICATIONS

## Features


The Model 265 Ruggedized Display is electrically identical to the Standard Model 260 Display except it comes standard with a 115 AC input. The 12-gauge steel case and 3/8-inch Lexan protects the Display from harsh environments. Like the lighter duty Model 260, it will operate with any standard RS232, RS485, or 20 mA current loop input to provide Remote Display capabilities for a computer, PLC, or scale display. The Model 265 Display has 5.5-inch tall digits viewable up to 125 feet in standard light or 75 feet in bright sunlight.



## Operation

Operation is identical to the Model 260 Display.

**Microframe® Model 265 Ruggedized Display**

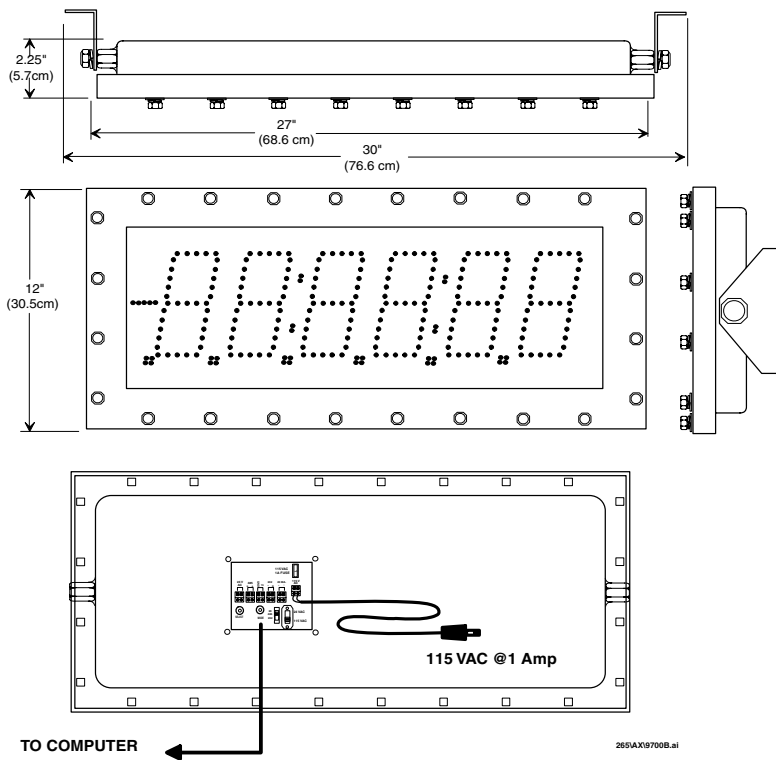

## Model 265 Ruggedized Outdoor Display Specifications

Protocol .....	RS232, RS485, or 20 mA
Power Input Requirements .....	24 VAC @ .15 Amps or 115 VAC @ .1 Amp
Baud Rate .....	1200 to 9600 Baud Switch Selectable
Maximum Number of Addresses .....	99 Different Display Addresses
Digit Height .....	5.5 Inch (14 cm)
Character Viewing Distance .....	125 Feet in Normal Light/75 Feet Daylight
Case .....	Powder Coated Steel with Lexan Faceplate
Operating Temperature .....	-20° C to 60° C or -4° F to 140° F
Weight .....	32 Pounds

**Support and Sales**  
**800-635-3811**

Microframe® Corporation  
www.microframecorp.com

P.O. Box 1700  
Broken Arrow, OK 74013