


TIMER CONNECTION DIAGRAM

Using RG59/U Cable


The Timer System is very easy to install if connected as shown using cable that is furnished, pre-cut and assembled by Microframe Corp.

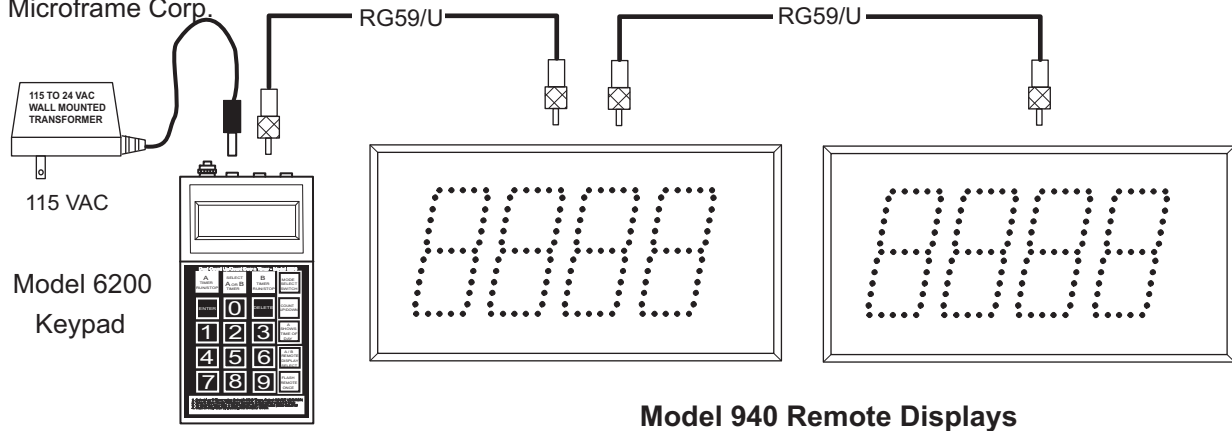

6200lax19701.eps

Using 16 or 18 AWG Paired Wire

The Timer System may also be connected with common 16 or 18 AWG paired wire utilizing the terminal blocks located at the rear of the Remote Displays and under the small slide-on cover of the Model 6200 Keypad.

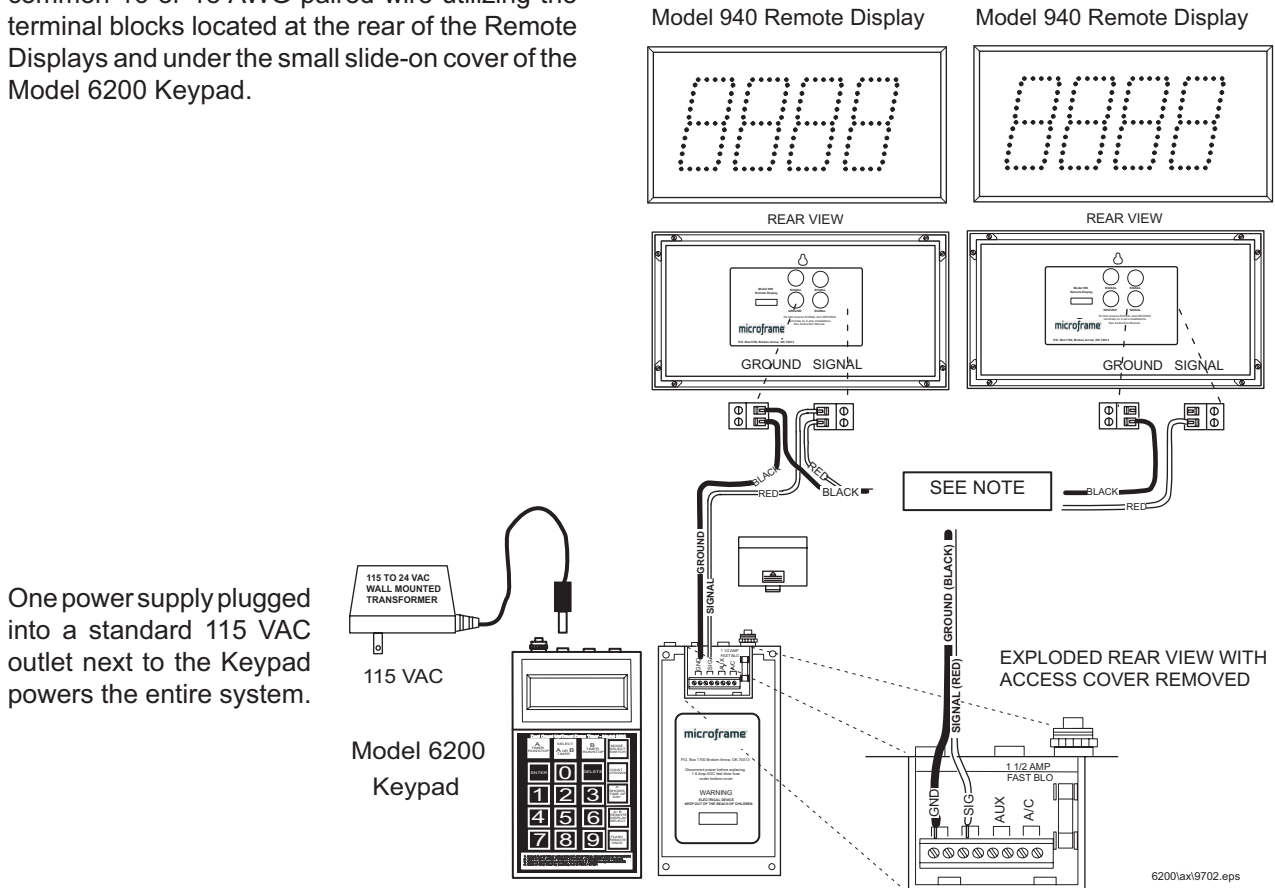

6200lax19702.eps

NOTE: THE MODEL 920 SIGNAL AND GROUND CONNECTIONS ARE REVERSED FROM THE MODELS 930 AND 940.