



# MODEL A0262 SPECIFICATIONS

## Remote Display

### Features


The Model A0262 Remote Display is designed to operate with any standard RS232 input to provide Remote Display capabilities for a computer, PLC or scale display. The Model A0262 Display has 1.5-inch tall digits and is encased in an aluminum extruded cabinet.

### Operation

The computer passes ASCII characters and a carriage return (ASCII 13D), and then the characters will be displayed on the Model A0262. To display a blank screen, pass a carriage return (ASCII 13D). Insert the decimal point in the number string and it will light. Pass a colon (:) and the right colon on the Display will light. Pass a percent sign (%) and the left colon will light. Leading zeros will be blanked if the user selectable option switch is enabled.



Microframe® Model A0262 Display

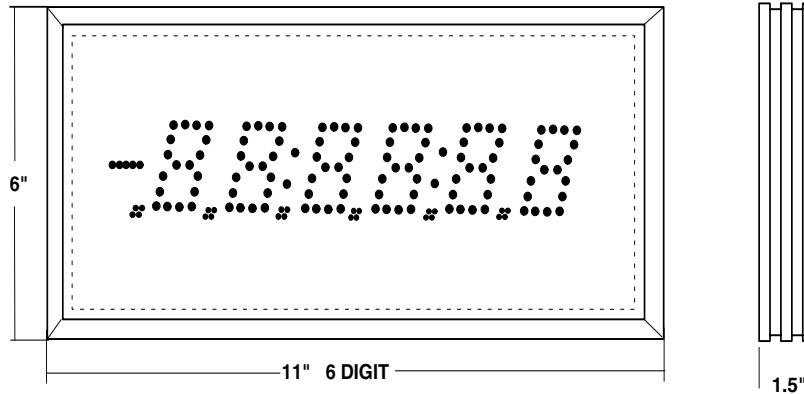

260\AXI9700E.ai

### Model 262 Specifications

Protocol .....	RS232
Power Input Requirements .....	16-24 VAC
Baud Rate .....	1200 to 9600 Baud Switch Selectable
Maximum Number of Addresses .....	7 Different Display Addresses
Digit Height .....	1.5 Inch
Operating Temperature .....	-20° C to 60° C or -4° F to 140° F

Support and Sales  
**800-635-3811**

Microframe® Corporation  
[www.microframecorp.com](http://www.microframecorp.com)

P.O. Box 1700  
 Broken Arrow, OK 74013